


A B C D E F G H J K L M N P

1
2
3
4
5
6
7
8
9

1
2
3
4
5
6
7
8
9

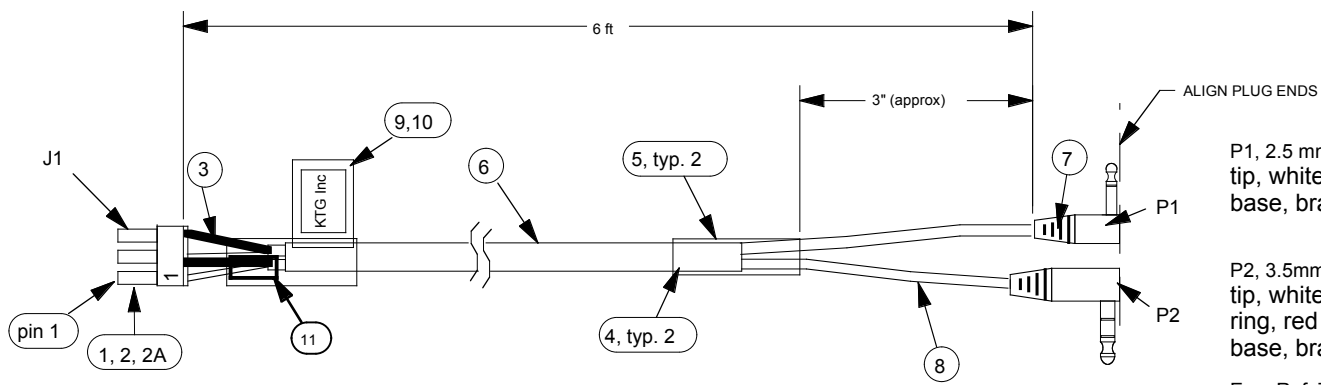


P1, 2.5 mm Ref.
tip, white - radio output high
base, braid - radio and output and mic low

P2, 3.5mm Ref.
tip, white - no connection
ring, red - mic high
base, braid - PTT high

Eng. Ref: To key radio: Connect PTT high to radio output/mic low

| Item | p.n. | Rev | Qty. | unit | Description |
|------|-------|-----|------|------|--|
| 11 | 30034 | 0 | 1 | in | 1/8" heat shrink |
| 10 | 85925 | 0 | 1 | ea | label, serial and part number |
| 9 | 60049 | 0 | 1 | ea | label, laminating |
| 8 | 86128 | 0 | 1 | ea | Cordset, plug, 3.5mm, stereo, Rt. angle, 72" |
| 7 | 40041 | 0 | 1 | ea | Cordset, plug, 2.5mm, mono, Rt. angle, 72" |
| 6 | 30070 | 0 | ~68 | in | Sleeve, polyester, 1/4", black, non-fray |
| 5 | 30071 | 0 | 3 | in | Tubing, heat shrink, 5/16" |
| 4 | 30200 | 0 | 0.2 | mL | Adhesive |
| 3 | 30049 | 0 | 2 | in | 1/16" heat shrink |
| 2A | 40118 | 0 | 2 | ea | Terminal, Female, Micro-fit, Gold, 20-24 AWG |
| 2 | 40153 | 0 | 2 | ea | Terminal, Female, Micro-fit, Gold, 26-30 AWG |
| 1 | 40154 | 0 | 1 | ea | Receptacle, Micro-fit, 6-circuit |

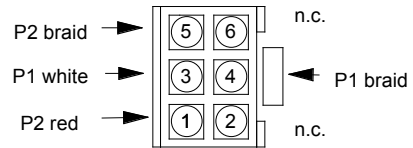

J1 REAR VIEW
J1 Reference

| Pin | Signal |
|-----|--------------|
| 1 | Mic Hi |
| 2 | Mic Lo |
| 3 | Radio Out Hi |
| 4 | Radio Out Lo |
| 5 | PTT Hi |
| 6 | PTT Lo |

NOTES:
1. DO NOT CRIMP TINNED WIRE
2. CRIMP THE BRAID WIRE WITH TERMINAL 40118

THIS DRAWING IS THE PROPERTY OF THE KENNEDY TECHNOLOGY GROUP, ROSE HILL, KANSAS

Kennedy Technology

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES
LINEAR
Fractional - 1/32"
0.05 ± 0.15
0.00 ± 0.015
0.000 ± 0.0015
ANGULAR
±0.5 DEG.

| | | |
|---------------------------------|----------------------------|---|
| REFERENCE 95265/85542 | RADIO HARNESS ASSY, Wouxun | |
| SIZE B | CADFILE | REV NO. |
| SCALE: NONE | | FOR ASSISTANCE CONTACT: vox 316-776-1111 fax 316-776-9035 |
| SHEET 1 OF 1 | | DRAWN _____ DATE _____ CHECKED _____ DATE _____ |

A B C D E F G H J K L M N P