

Radio Harness Installation Guide


Harley Trunk Mount

Document part number 65230

Kennedy Technology Group, Inc.
614 Ridgeway
Rose Hill, Kansas 67133 - USA
voice 316.776.1111 • fax 316.776.9035
email:kennedy@cellset.com

Shown below is the end of the KTG Radio Harnesses which is common to each Kennedy radio harness.

Connect KTG Radio Harnesses jack J1 to the FRSet Sub-module

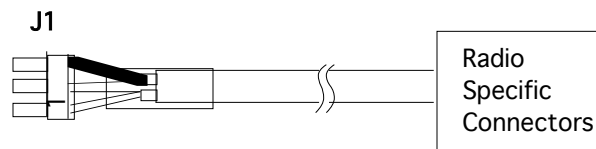

Temporarily run the cable harness down the right side of the bike and connect it to the trunk mounted radio.

The harness will be mounted under along the bike's wiring harness located along the right side of the bike frame beneath the fuel tank and seat.

Before removing the bike's seat, fuel tank, and trunk liner, test the radio interface with the bike's engine running. Listen for engine interference. Route the harness to minimize this noise, if required. If operation is satisfactory, remove the seat, tank, and liner and secure the radio harness to the bike's existing harnesses. Drill a 9/16" hole in the trunk and insert the radio harness's grommet. Secure the grommet with super-glue or equivalent.