


Rev	Description	by	Date
0	release	jj	6/7/04
1	J1 was P2, 40118 was 40119, 40133 was 40132, 40153 was 40152, 60108 was rev 0 65200 was Rev 0	jj	8/26/04

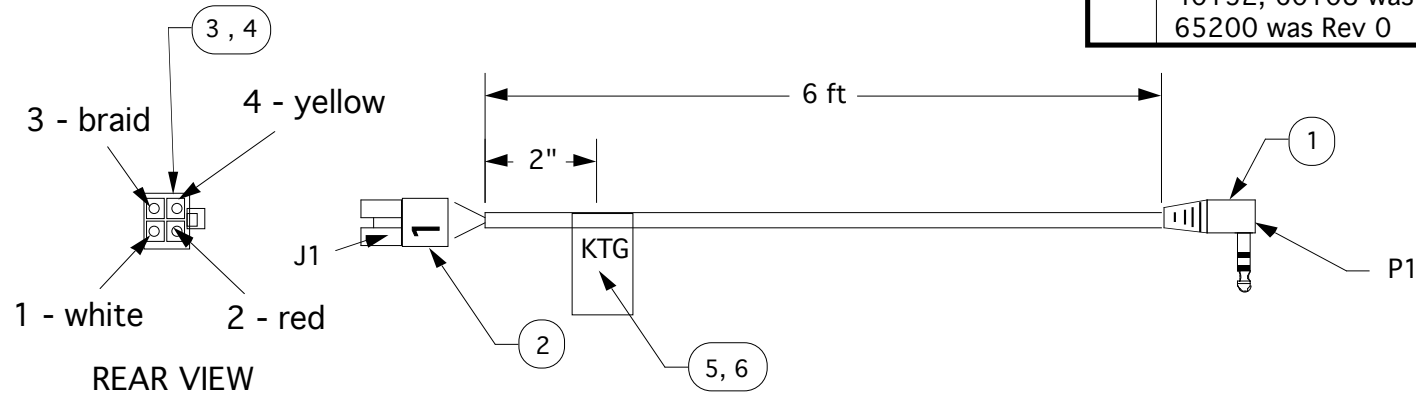

Note: Do not crimp tinned wires.  
Crimp to include part of braid's heatshrink

6	60049	1	ea	label, overlaminating
5	60108	1	ea	label, Cell phone NOK4
4	40153	3	ea	Terminal, female microfit, 24-30 AWG
3	40118	1	ea	Terminal, female microfit, 20 - 24 AWG (Braid)
2	40133	1	ea	Receptacle microfit, 4 circuit
1	85496	1	ea	Cordset, cell phone, Nok4
Item	p.n.	Qty.	unit	Description

THIS DRAWING IS THE PROPERTY OF THE KENNEDY TECHNOLOGY GROUP, ROSE HILL, KANSAS

<i>Kennedy Technology</i>				UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES <b>TOLERANCES</b> LINEAR Fractional - 1/32" 0.0 ≤ ± 0.15 0.00 ≤ ± 0.015 0.000 ≤ ± 0.0015 ANGULAR ±0.5 DEG.	
REFERENCE <b>85106R3</b>		Cordset, cell phone, nok4			
SIZE <b>A</b>	CADFILE	DWG NO. <b>95301</b>	REV NO. <b>1</b>	EFFECTIVE <b>sn:</b>	
SCALE: NONE			FOR ASSISTANCE CONTACT: vox 316-776.1111 fax 316-776.9035		CHECKED
SHEET 1 OF 1					DATE
					DESIGN
					DATE