



A B C D E F G H J K L M N P

1
2
3
4
5
6
7
8
9

Rev	Description	by	Date
1	85988 was 85396	jj	7/10/08

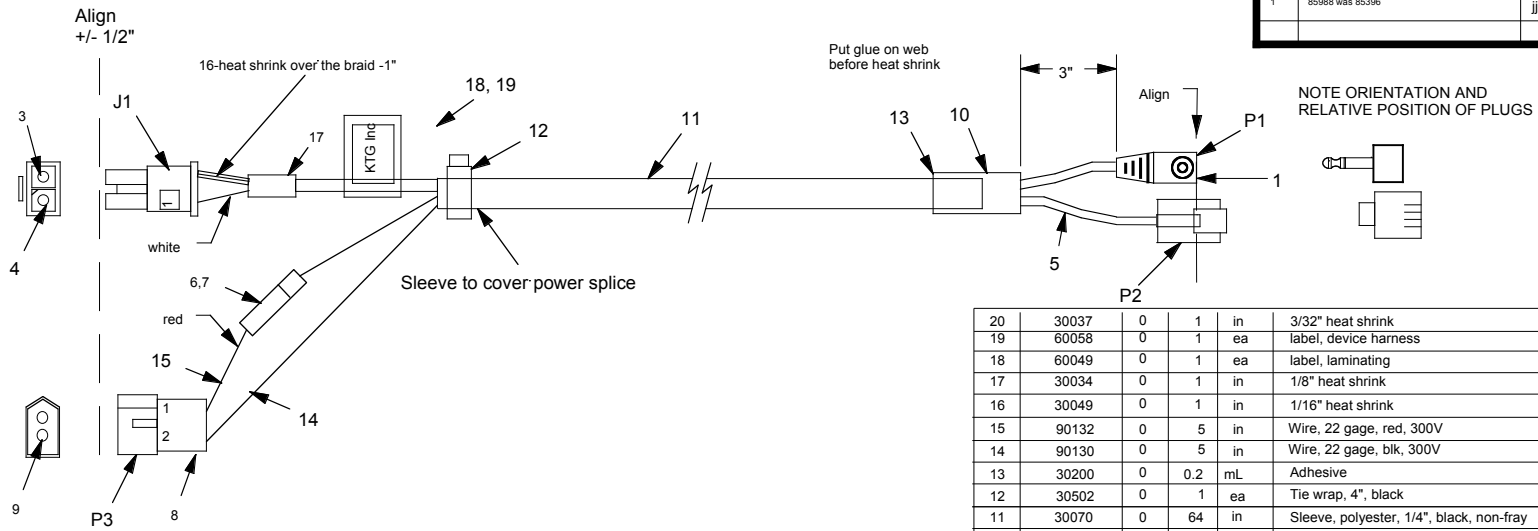

20	30037	0	1	in	3/32" heat shrink
19	60058	0	1	ea	label, device harness
18	60049	0	1	ea	label, laminating
17	30034	0	1	in	1/8" heat shrink
16	30049	0	1	in	1/16" heat shrink
15	90132	0	5	in	Wire, 22 gage, red, 300V
14	90130	0	5	in	Wire, 22 gage, blk, 300V
13	30200	0	0.2	mL	Adhesive
12	30502	0	1	ea	Tie wrap, 4", black
11	30070	0	64	in	Sleeve, polyester, 1/4", black, non-fray
10	30071	0	1.5	in	Tubing, heat shrink, 5/16"
9	40025	0	2	ea	Contact, pin, 24-30 ga
8	40015	0	1	ea	Plug, 2-conductor
7	75006	0	1	ea	Fuse, 2A, 3AG
6	75036	0	1	ea	Holder, fuse, 3AG
5	85510	0	1	ea	Cordset, black, RG11,
4	40153	0	1	ea	Terminal, female, Micro-fit, gold, 26-30 AWG
3	40118	0	1	ea	Terminal, female, Micro-fit, gold, 20-24 AWG
2	40115	0	1	ea	Receptacle, Micro-fit, 2 circuit
1	85988	0	1	ea	Cordset, plug, 3.5mm, mono, 72", modified
Item	p.n.	Rev	Qty.	unit	Description

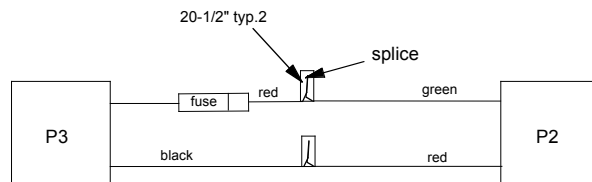

THIS DRAWING IS THE PROPERTY OF THE KENNEDY TECHNOLOGY GROUP, ROSE HILL, KANSAS

Kennedy Technology

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES
LINEAR
Fractional - 1/32"
0.0 ± 0.15
0.00 ± 0.015
0.000 ± 0.0015
ANGULAR
±0.5 DEG.

REFERENCE		XXXXXX		Harness, Passport		0.00 ± 0.015 0.000 ± 0.0015 ANGULAR ±0.6 DEG.	
SIZE	B	CADFILE	DWG NO.	95208	REV NO.	1	EFFECTIVE
SCALE: NONE				FOR ASSISTANCE CONTACT:		DRAWN	DATE
SHEET 1 OF 1				vox 316-776-1111 fax 316-776-9035		CHECKED	DATE

A B C D E F G H J K L M N P