


Rev	Description	by	Date
0	release	jj	6/7/04
1	J1 was P2, 40118 was 40119, 40133 was 40132, 40153 was 40152, 60107 was rev 0 65200 was Rev 0	jj	8/26/04

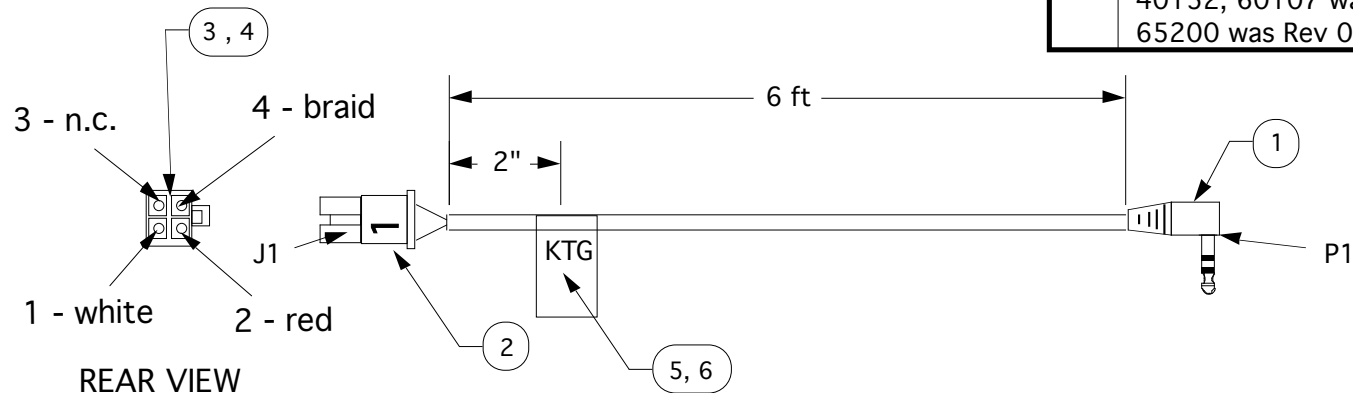

Note: Do not crimp tinned wires.
Crimp to include part of braid's heatshrink

6	60049	1	ea	label, overlaminating
5	60107	1	ea	label, Cell phone univ
4	40153	2	ea	Terminal, female microfit, 24-30 AWG
3	40118	1	ea	Terminal, female microfit, 20 - 24 AWG (Braid)
2	40133	1	ea	receptical microfit, 4 circuit
1	85106	1	ea	Cordset, cell phone, Univ
Item	p.n.	Qty.	unit	Description

THIS DRAWING IS THE PROPERTY OF THE KENNEDY TECHNOLOGY GROUP, ROSE HILL, KANSAS

<i>Kennedy Technology</i>				UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES LINEAR Fractional - 1/32" 0.0 ± 0.15 0.00 ± 0.015 0.000 ± 0.0015 ANGULAR ±0.5 DEG.	
REFERENCE 85106R3		Cordset, cell phone, univ			
SIZE A	CADFILE	DWG NO. 95300	REV NO. 1	EFFECTIVE sn:	
SCALE: NONE			FOR ASSISTANCE CONTACT: vox 316-776.1111 fax 316-776.9035		CHECKED DATE
SHEET 1 OF 1					DESIGN DATE