

A

B

C

D

E

F


G

H

J

K


Rev	Description	by	Date
0	release	jj	4/5/070

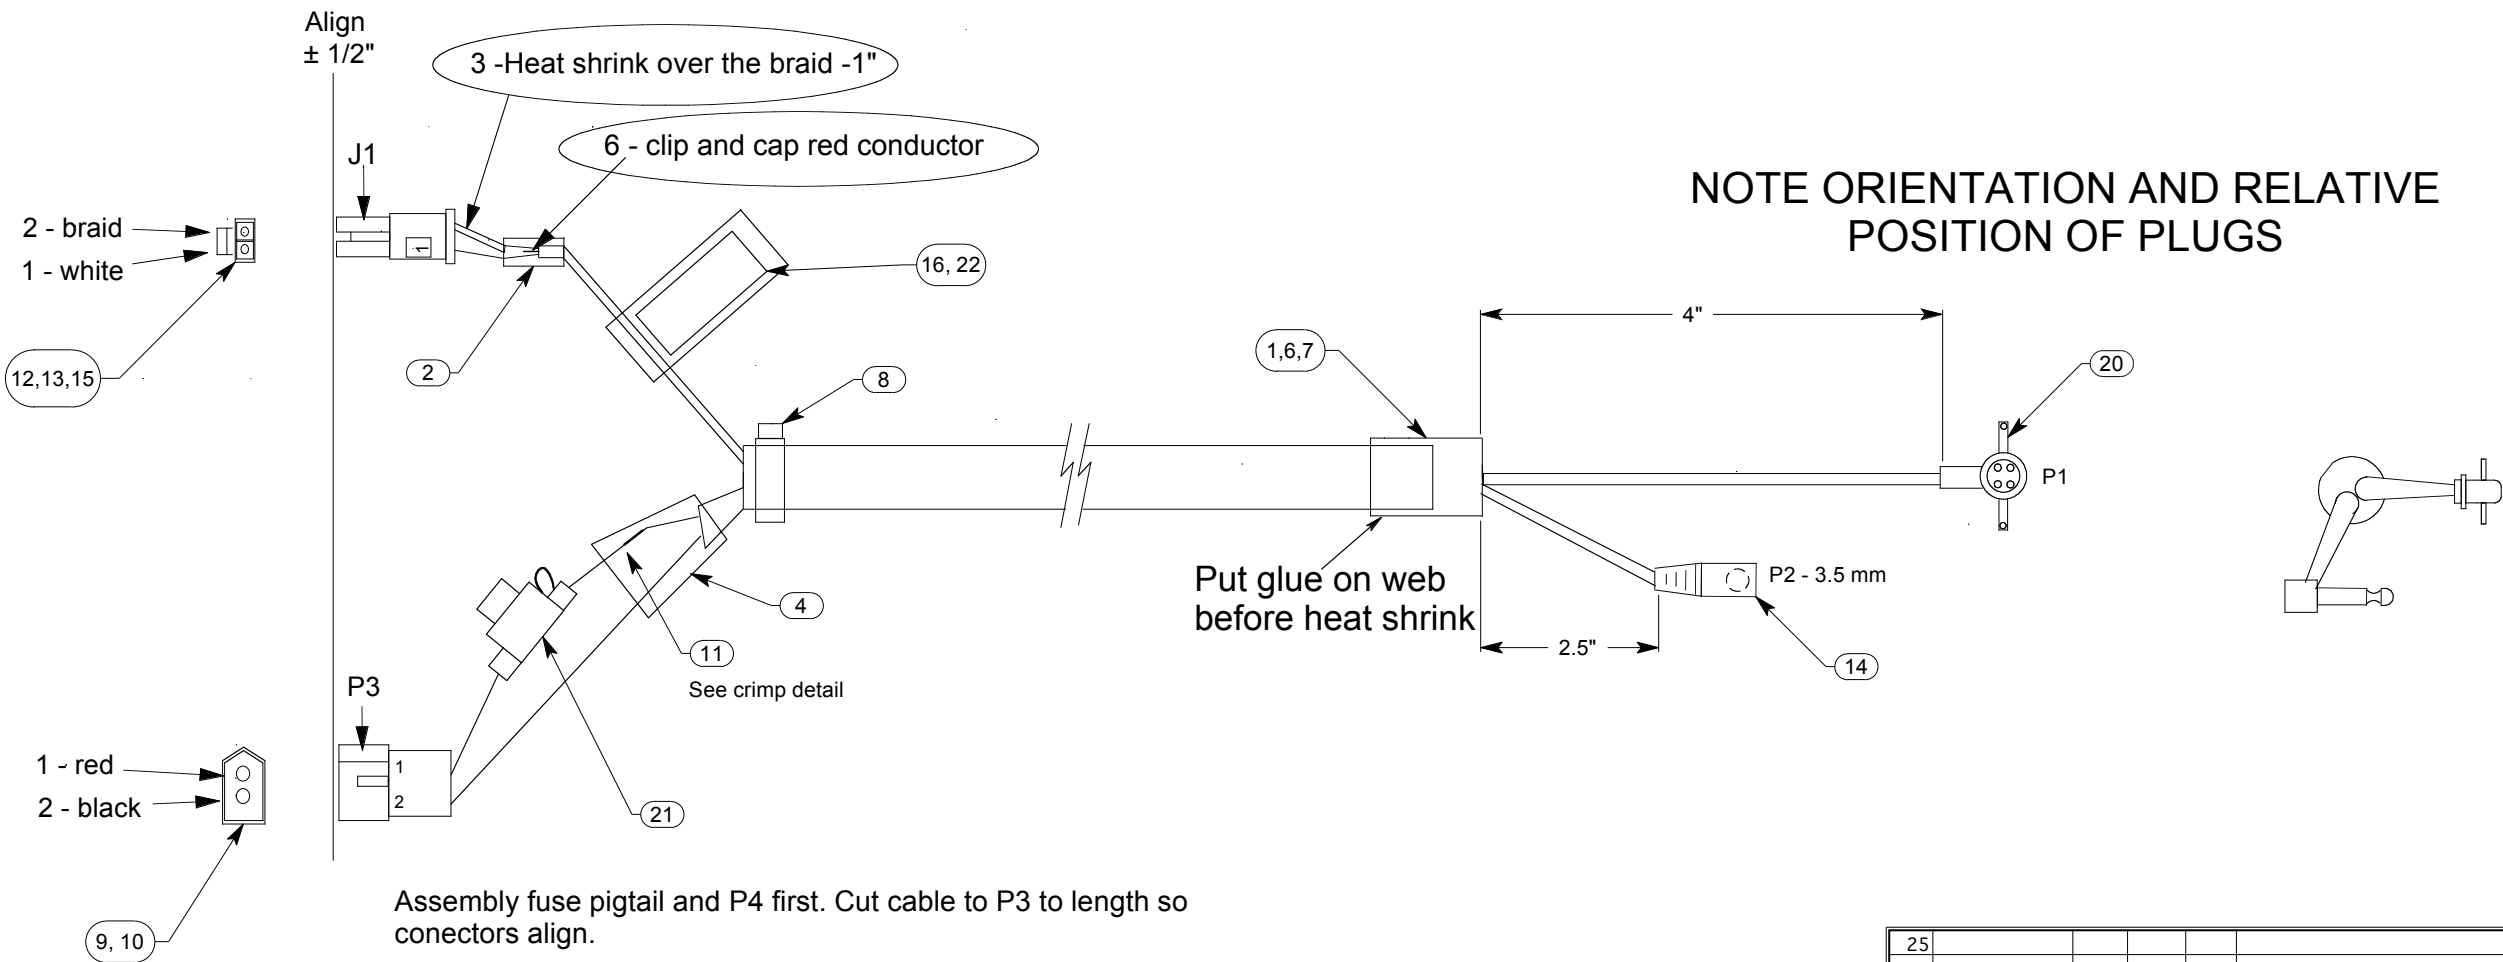

Assembly fuse pigtail and P4 first. Cut cable to P3 to length so connectors align.

CRIMP DETAIL

Prior to crimping, remove 1/2 of stranded conductors from black pigtail

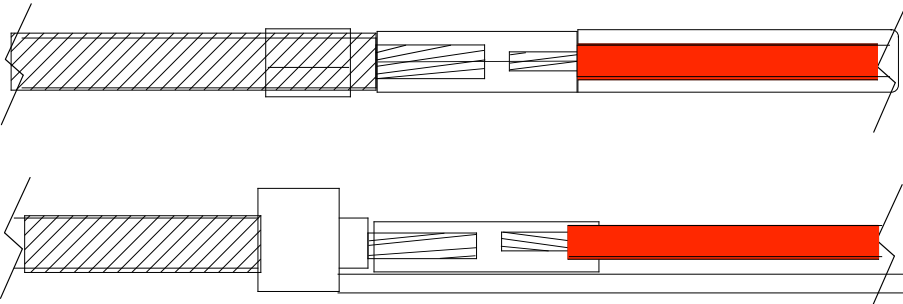

25					
24					
23					
22	85925	0	1	ea	Label, s/n and p/n
21	85879	0	1	ea	Fuse Holder from, Garmin, Zumo, Modified harness
20	85878	0	1	ea	Harness, Garmin, Zumo, Modified
19	85225	1	1	ea	Kit, tie wrap
18	70007	0	1	ea	Bag, Poly, 5"x14"
17	65167	1	1	ea	Usersheet, Device Harness
16	60049	0	1	ea	label, overlaminating, 1.25 x 3
15	40153	0	1	ea	Terminal, Female, Micro-fit, gold, 26-30 AWG
14	40127	0	1	ea	Cordset, stereo, 3.5mm, Right angle, 72", black
13	40118	0	1	ea	Terminal, Female, Micro-fit, gold, 20-24 AWG
12	40115	0	1	ea	Receptacle, Micro-fit, 2 circuit
11	40067	0	1	ea	Contact, pin, Hitachi-type
10	40025	0	2	ea	Contact, pin, 18-24AWG, 0.062"
9	40015	0	1	ea	plug, 2 conductor
8	30502	0	1	ea	Tie wrap, 4", Black
7	30200	0	0.2	mL	Adhesive
6	30085	0	0.25	in	Tubing, heat shrink, 3/64"
5	30070	0	56	in	Sleeve, polyester, 1/4", black, non-fray
4	30057	0	2	in	Tubing, heat shrink, 3/16
3	30049	0	1	in	Tubing, heat shrink, 1/16
2	30034	0	1	in	Tubing, heat shrink, 1/8"
1	30029	0	1.5	in	Tubing, heat shrink, 3/8
Item	Part #	Rev	Qty	Unit	Description

THIS DRAWING IS THE PROPERTY OF THE KENNEDY TECHNOLOGY GROUP, ROSE HILL, KANSAS

Kennedy Technology

REFERENCE
95412

Harness, Garmin Zumo 450

SIZE
C

CADFILE

DWG NO.

95437

REV NO.

0

EFFECTIVE
sn:

SCALE: NONE

FOR ASSISTANCE CONTACT:

vox 316-776-1111
fax 316-776-9035

DRAWN

DATE

SHEET 1 OF 1

CHECKED

DATE

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES
LINEAR
Fractional - 1/32"
0.0 $\pm$ 0.15
0.00 $\pm$ 0.015
0.000 $\pm$ 0.0015
ANGULAR
 $\pm$ 0.5 DEG